

# ProLock™

## Scalable Locker Solution




This access-controlled, flexible locker solution allows you to manage the distribution of both consumable items and valuable assets such as returnable hand tools and power tools. The ProLock includes individual lockers with configurable shelves so it can easily be customized on site. The ProLock allows for different combinations of locker sizes to expand for larger items and includes the ability to control access to specific lockers.

- Improve operational efficiencies
- Manage serial IDs, kits, and expendables
- Monitor calibrated items and schedules




## ProLock Configurations


The ProLock locker solution is available in the standard 24-door and 12-door models and the compact 20-door model. The ProLock is field-configurable by simply linking the doors of each of locker together and removing shelves. This allows the capability to lock multiple doors at once. The ProLock can be a main or auxiliary unit.

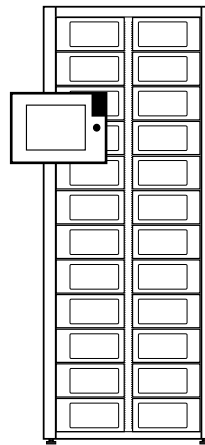

Standard

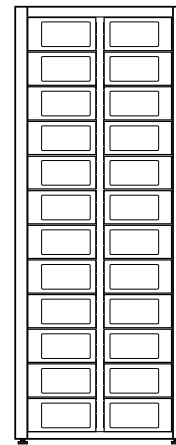

Auxiliary

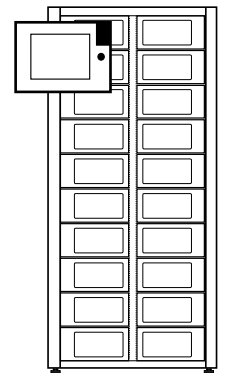

Compact


# ProLock Lockers

Linked Locker Dimensions			
Lockers	1	2	3
Height (in)	5.06	11.19	17.31
Height (cm)	12.86	28.42	43.97

Each locker width is 11 in / 27.94 cm and depth is 28.25 in / 71.76 cm.

Optional locker combinations are available.

Maximum locker capacity 70 lbs / 31.75 kg.

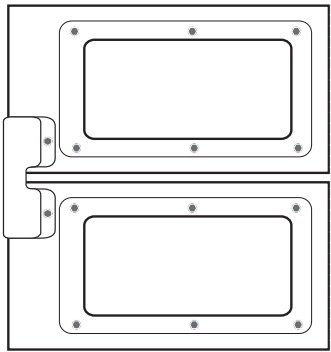

Locker doors are linked by overlapping brackets.

## Accessories

- Accessible power strip with 24 outlets allowing for a charging station within a ProLock (available in North America only)
- LED lights for enhanced visibility (preorder only, no field conversions)

## Suggested Inventory Types

The ProLock is ideal for storage of durable inventory such as:

- Power tools
- Hand tools
- Gauges
- Consumables
- Gloves

# ProLock Specs

Standard Main Exterior Dimensions		
Height	83 in	210.82 cm
Width	35 in	88.9 cm
Depth	37 in	93.98 cm
Standard Auxiliary Exterior Dimensions		
Height	83 in	210.82 cm
Width	30.5 in	77.47 cm
Depth	32 in	81.28 cm
Compact Main Exterior Dimensions		
Height	70 in	177.8 cm
Width	35 in	88.9 cm
Depth	37 in	93.98 cm
Compact Auxiliary Exterior Dimensions		
Height	70 in	177.8 cm
Width	30.5 in	77.47 cm
Depth	32 in	81.28 cm
Weight		
Standard Main	515 lbs	234 kg
Standard Auxiliary	465 lbs	211 kg
Compact Main	498 lbs	226 kg
Compact Auxiliary	448 lbs	203 kg
Power Requirements		
Amps	3	1.5 (EU)
Voltage	120	230 (EU)
Operating Environment		
Temperature	32°F to 95°F	0°C to 35°C
Humidity	20% to 85% (no condensation)	
Technical Info		
CE Compliant		
Windows OS		



CribMaster Global Headquarters  
1955 West Oak Circle  
Marietta, GA 30062

Toll Free // 1.877.960.0602  
www.cribmaster.com